

ECO Line II

Linear LED luminaire

IP42 | 160lm/W



100 000 h

>50 000

100% (<1s)

⊗ ↗

C **A**
G

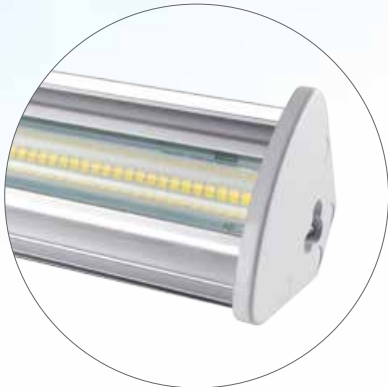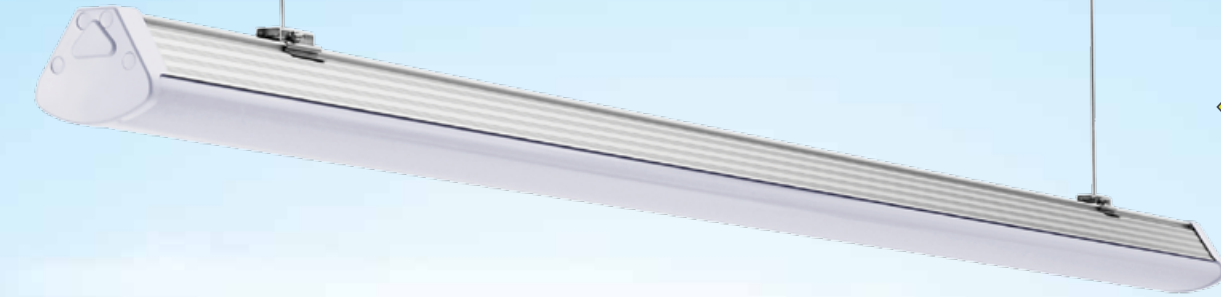

4000 K
LEL020WB 20W

IP 42 IK 08 lumen 3200 20W 220-240V 50/60 Hz 90° CRI(RA) >80 Kelvin 4000 F Hg PF >0,9

4000 K
LEL040WB 40W

IP 42 IK 08 lumen 6400 40W 220-240V 50/60 Hz 90° CRI(RA) >80 Kelvin 4000 F Hg PF >0,9

4000 K
LEL050WB 50W

IP 42 IK 08 lumen 8000 50W 220-240V 50/60 Hz 90° CRI(RA) >80 Kelvin 4000 F Hg PF >0,9

4000 K
LEL060WB 60W

IP 42 IK 08 lumen 9600 60W 220-240V 50/60 Hz 90° CRI(RA) >80 Kelvin 4000 F Hg PF >0,9

Q	WATT	IP	Lumen	Beam	Volt	Color	CRI	cos φ Power Factor	EAN	EEI	Size
LEL020WB	20W	42	3200lm	90°	200-240V	4000K	>80	>0,9	---	C	600x72x54mm
LEL040WB	40W	42	6400lm	90°	200-240V	4000K	>80	>0,9	---	C	1200x72x54mm
LEL050WB	50W	42	8000lm	90°	200-240V	4000K	>80	>0,9	5901087210519	C	1500x73x55mm
LEL060WB	60W	42	9600lm	90°	200-240V	4000K	>80	>0,9	---	C	1500x73x55mm