



## LED Panel 40W (4x18W\*) 3200lm 120° IP20 cold light 6000K

### General characteristics

Family name	HPL4060C
Luminaire type	LED Panel
LED chips manufacturer	San'an
Installation options	Recessed, surface mounted, suspended
Intelligent control	No
Certificates	CE, RoHS
Warranty	2 years

### Light technical characteristic

Luminaire luminous flux	3200lm
Luminous efficacy	80lm/W
Color temperature	6000K
Light color	cold
CRI	>80
Beam angle	120°
Color consistency	<6SDMC

### Operating characteristic

Lifetime	20 000h
Switching cycle	> 15 000
LLMF	0,7
IP	20
Warm up time	negligible
Starting time	<0,5s
Working temperature	from -20° to 40°C
Storage temperature	from -20° to 40°C

### Mechanical characteristic

Light source dimensions	595x595x10mm
Packaging dimensions	L640xW630xH60mm
Weight net	2,15kg
Weight gross	3kg
Material	PC, aluminum


### Electrical characteristic

Wattage	40W
Replaces*	4x18W
Voltage	175-165V
Voltage frequency	AC
Power factor	>0,9
Energy efficiency label	A+


### Rated parameters

Rated power	40W
Rated luminous flux	3200lm
Rated lifetime	20 000h
Rated beam angle	120°


### Technical drawing



### Photometric solid

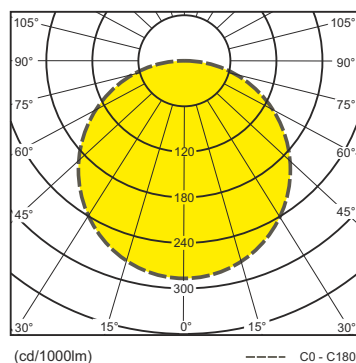

### Spectrum

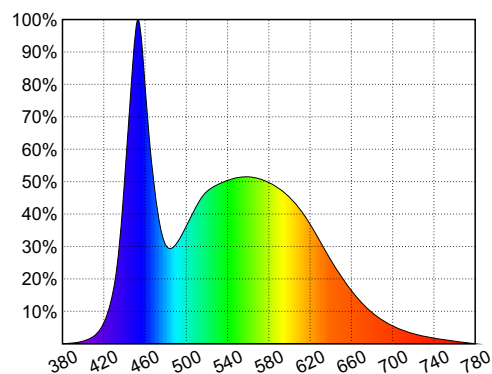

\*wattage of luminaire with linear fluorescent lamp