

General characteristics

Family name	Backlite Panel
Luminaire type	Ceiling lamp
Integrated driver	Yes
Installation options	Recessed, surface
Intelligent control	None
Certificates	CE, RoHS
Warranty*	3 years



Light technical characteristic

Luminaire luminous flux	4400lm
Luminous efficacy	110lm/W
Color temperature	4000K
CRI	>80
Beam angle	120°
Color consistency	<6SDCM

Electrical characteristics

Wattage	40W
Voltage	200-240V
Voltage frequency	50-60Hz
Power factor	>0,9
Energy efficiency label	E

Operating characteristics


Lifetime	25 000h
Switching cycle	>25 000
LLMF	>0,7
IP	44
Warm up time	negligible
Starting time	<0,5s
Working temperature	from -20° to 45°C
Storage temperature	from -20° to 60°C



index	power	luminous flux	beam angle	IP	weight net/gross	luminaire dimensions	packaging dimensions
LOB4060ST	40W	4400lm	120°	44	1,7kg/2,5kg	L595xW595xH30mm	L645xW645xH35mm

*According to Lumax warranty conditions

Photometric solid

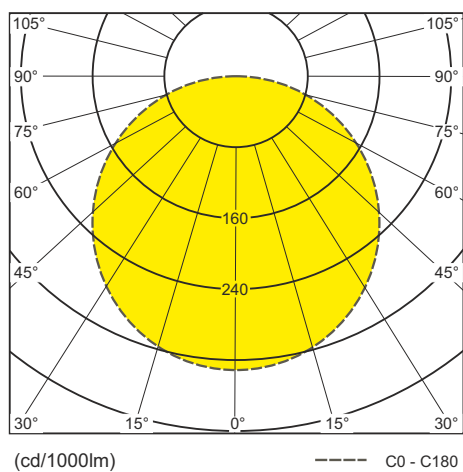

Spectrum for CCT: 4000K

